Features:
- Cast brass spout and valve
- Ceramic disc valve cartridge
- Adjustable hot limit safety stop
- Pressure Balance cartridge maintains constant output temperature in response to changes in relative hot and cold supply pressures
- Integral diverter
- Concealed mounting hardware
- Multifunction showerhead
- Available in 3 Handle Options
- Maximum Showerhead Flow Rate: 2.5 GPM (9.5L/min)

Pictured:
853/400 Tub & Shower Set with Cross Handle

Description	Handle Type	Product Number
Tub & Shower Set	Cross	853/400
Tub & Shower Set	Straight Lever	853/401
Tub & Shower Set	Crystal Lever	853/404
PB Diverter Valve Set	Cross	853/140
PB Diverter Valve Set	Straight Lever	853/141
PB Diverter Valve Set	Crystal Lever	853/144

Available Finishes	Finish Code
Polished Chrome	100
Brushed Nickel	144
Platinum Nickel	150

| Rough & Trim Options	Handle Type	Product Number
Tub & Shower Set Trim Only*	Cross	853/495
Tub & Shower Set Trim Only*	Straight Lever	853/496
Tub & Shower Set Trim Only*	Crystal Lever	853/499
PB Diverter Valve Set Trim Only **	Cross	853/545
PB Diverter Valve Set Trim Only **	Straight Lever	853/546
PB Diverter Valve Set Trim Only **	Crystal Lever	853/549
Showerhead Only		860/088
Tub Spout Only		894/908
Rough Only		899/261/191

* Includes Pressure Balance Diverter Valve Trim, Showerhead, Shower Arm & Tub Spout
**Pressure Balance Diverter Valve Trim Only

Extension Kits	Product Number
PB Handle Extension Kit	A3195.191
PB Diverter Extension Kit	A3196.191

Handle Options:

Cross Handle

Straight Lever

Crystal Lever
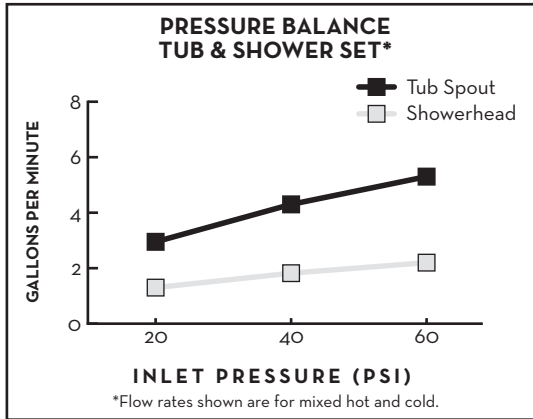
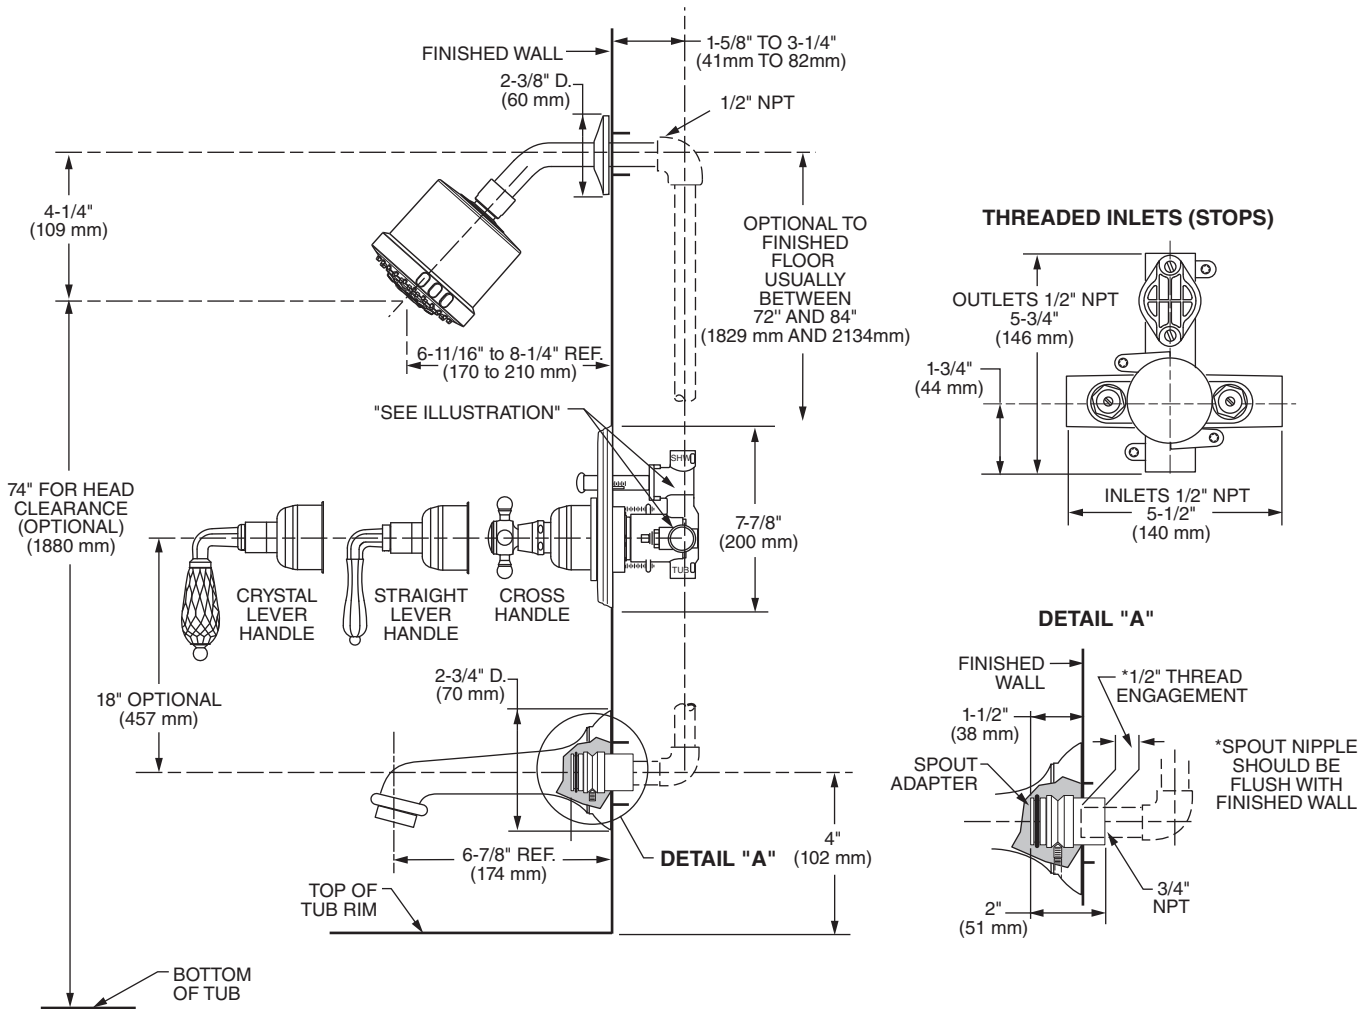ROUGH-IN DIAGRAM
SHOWN ON REVERSE SIDE

JADO®

CODES & STANDARDS

These products meet and exceed the following codes and standards:

- **ASME A112.18.1**
- **CSA B125.1**
- **ASSE 1016**

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

PRESSURE BALANCE TUB & SHOWER SET*

- ■ Tub Spout
- □ Showerhead

GALLONS PER MINUTE

INLET PRESSURE (PSI)

*Flow rates shown are for mixed hot and cold.

FINISHED WALL

1-5/8" TO 3-1/4"
(41mm TO 82mm)

2-3/8" D.
(60 mm)

1/2" NPT

4-1/4"
(109 mm)

OPTIONAL TO
FINISHED
FLOOR
USUALLY
BETWEEN
72" AND 84"
(1829 mm AND 2134mm)

6-11/16" to 8-1/4" REF.
(170 to 210 mm)

THREADED INLETS (STOPS)

OUTLETS 1/2" NPT
5-3/4"
(146 mm)

1-3/4"
(44 mm)

INLETS 1/2" NPT
5-1/2"
(140 mm)

"SEE ILLUSTRATION"

74" FOR HEAD
CLEARANCE
(OPTIONAL)
(1880 mm)

CRYSTAL
LEVER
HANDLE

STRAIGHT
LEVER
HANDLE

CROSS
HANDLE

7-7/8"
(200 mm)

18" OPTIONAL
(457 mm)

2-3/4" D.
(70 mm)

6-7/8" REF.
(174 mm)

TOP OF
TUB RIM

DETAIL "A"

4"
(102 mm)

DETAIL "A"

FINISHED
WALL

1-1/2"
(38 mm)

SPOUT
ADAPTER

*1/2" THREAD
ENGAGEMENT

*SPOUT NIPPLE
SHOULD BE
FLUSH WITH
FINISHED WALL

3/4"
NPT

2"
(51 mm)

BOTTOM
OF TUB

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.