



Features:

- 1/2" sweat valves integrated
- Easily removable front cover for access to technical elements
- Common box for the electronic board and the batteries
- Four 1.5V C sized batteries (included)
- Batteries will last two years with average usage of a four person household
- Start up temperature 98.6°F (37°C) - Max. temperature 118° F (48°C)
- Thermostatic mixing valve built into product
- Showerhead maximum flow rate 2.5 GPM 9.5 L/min
- Hand Shower maximum flow rate 2.2 GPM 8.3 L/min
- Automatic diversion to the hand shower when it is removed from the holder
- Hand Shower holder in the base of the column
- Recommended for residential application only

	Handle Type	Product Number
Thermostatic Shower Column	N/A	821/475

Available Finishes:	Finish Code
Polished Chrome	100

ROUGH-IN DIAGRAM SHOWN ON REVERSE SIDE



CODES & STANDARDS

These products meet and exceed the following codes and standards:

ASME A112.18.1

CSA B125

ASSE1016

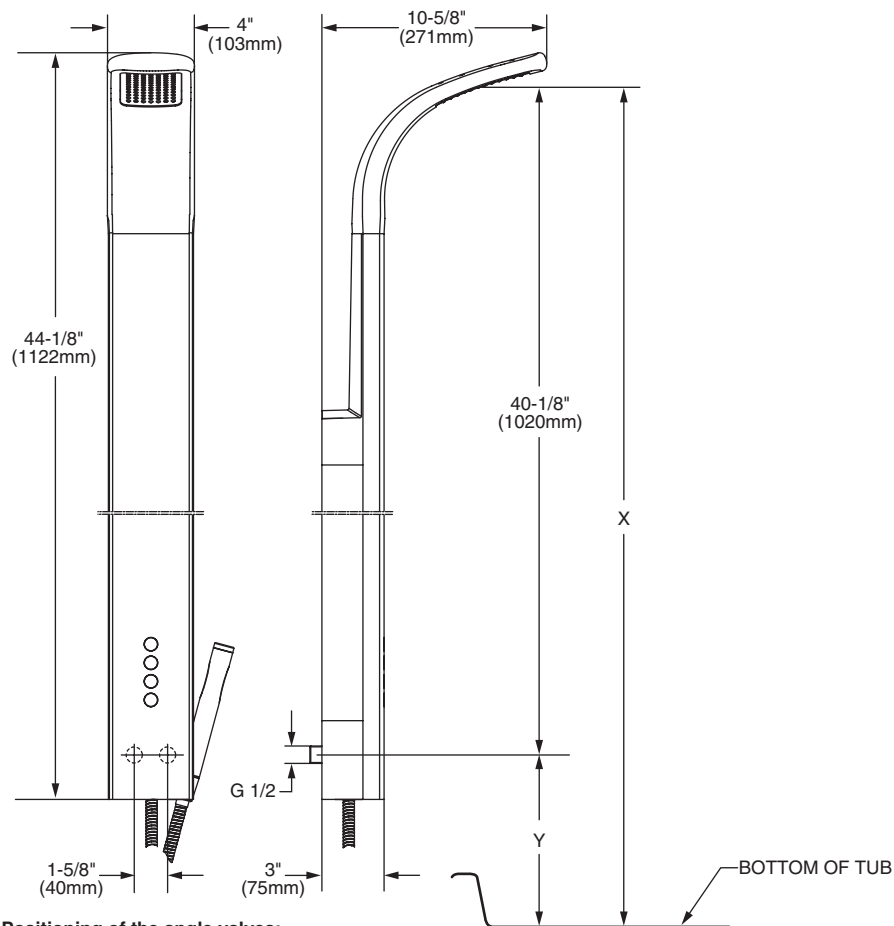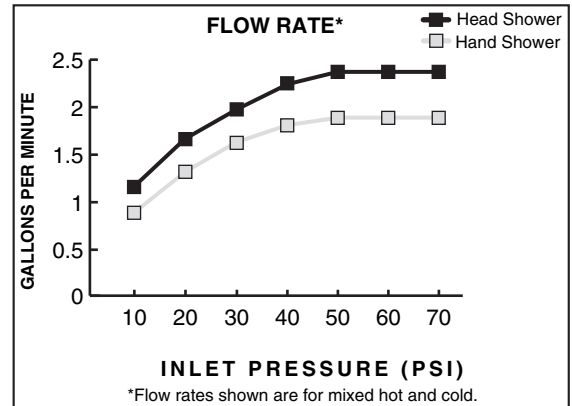

Positioning of the angle valves:

Body Size	59" (150cm)	64-1/8" (163cm)	69-1/4" (176cm)	74-7/8" (190cm)	Nominal Dimension	
Height of Head Brake (middle of shower head)	70-7/8" (1800mm)	77" (1956mm)	83-1/8" (2112mm)	89-3/4" (2280mm)	78-3/4" (2000mm)	X
Angle Valve	30-3/4" (780mm)	36-7/8" (936mm)	43" (1092mm)	49-5/8" (1260mm)	38-1/2" (980mm)	Y

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.