





Features:

- Cast brass spout and side valves
- Ceramic disc valve cartridges
- Flexible Hose Connections for 6"-12" installations
- Available in 3 handle options
- Includes 1-1/4" drain assembly
- Lead Free - Faucet contains ≤ 0.25% total lead content by weighted volume
- Maximum Flow Rate: 1.5 GPM (5.7L/min)


Pictured:

853/938 Widespread Faucet w/Cross Handles

Description	Handle Type	Product Number	Available Finishes	Finish Code
Widespread Faucet	Cross	853/938	Polished Chrome	100
Widespread Faucet	Straight Lever	853/948 	Brushed Nickel	144
Widespread Faucet	Crystal Lever	853/868 	Platinum Nickel	150

ROUGH-IN DIAGRAM
SHOWN ON REVERSE SIDE


Handle Options:



Cross Handle



Straight Lever




Crystal Lever




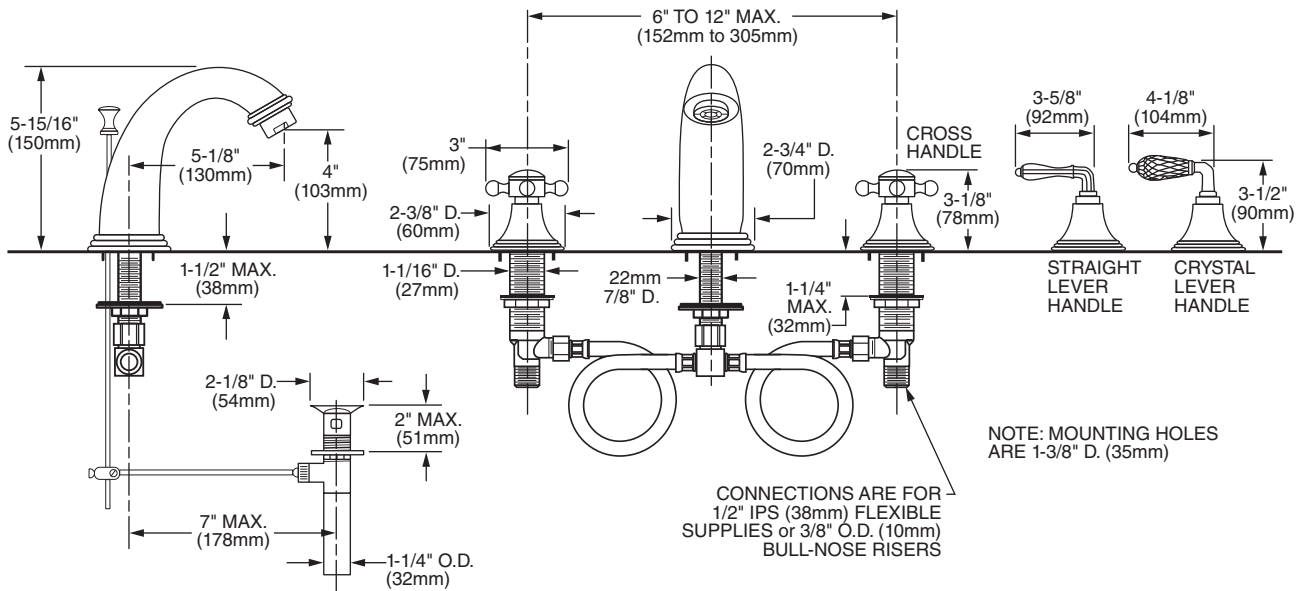
CODES & STANDARDS

These products meet and exceed the following codes and standards:

- ASME A112.18.1
- CSA B125.1
- NSF 61/Section 9
- EPA WaterSense® High Efficiency Lavatory Faucet Specification
- Certified Compliant with 0.25% Weighted Average Lead Content Regulations

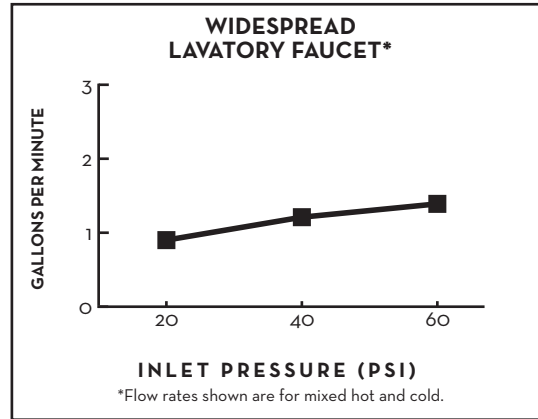

 Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.



IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

